



Atlas Copco



# Lighting The Path To Productivity.

HiLight V5+

Now with New SMD LED Light

# Shine Bright, Even in Dusty Depths

## Technical Data

	HiLight V5+
Light coverage m <sup>2</sup>	5000 (average 20 luxes) LED
Lamps	SMD
Mast	Vertical manual
Extra features	HardHat Canopy

Performance Data		
Rated frequency	Hz	50
Rated voltage	VAC	230
Rated power (PRP)	kW	5
Engine		
Make/Model		Kohler / KD441-GS12
Speed	rpm	3000
Rated net output (PRP)	kW	6.1 @ 3000rpm
Cooling Type		Air Cooled
Number of cylinders		1
Alternator		
Make		Sincro
Rated output	kVA	5
Enclosure protection	IP	23
Energy Consumption		
Fuel tank capacity	l	80
Run time with 4 lamps on with fuel tank	hrs	111.1
Power output		
Auxiliary power	kW	10 AMPS only if lamps are OFF
Lights		
Type		SMD type LED
Wattage	W	4 x 250
Average luminosity over coverage area	lux	20
Average coverage area	m <sup>2</sup>	5000
Impact Protection	IK	IK10
Ingress Protection	IP	IP69
Mast		
Type		Manual vertical, 5 section
Rotation	degrees	355
Maximum height	m	7.5
Maximum speed wind	km/h	85
Enclosure and trailer		
Enclosure		Gull-wing HardHat' doors
Dimensions and weight		
Dimensions in transport Fix Towbar (L x W x H)	m	2.2 x 1.1 x 2.8
Weight (Dry / Wet)	kg	625/700

Contact:  
Ankan Ghosal | +91 9073948993 | [ankan.ghosal@atlascopco.com](mailto:ankan.ghosal@atlascopco.com)

Atlas Copco

**Atlas Copco (India) Private Limited**  
[Formerly known as Atlas Copco (India) Limited]  
Reach us: [cr.india@atlascopco.com](mailto:cr.india@atlascopco.com)  
Toll free number: 1800 120 110030  
[atlascopco.com/en-in](http://atlascopco.com/en-in)

## Key applications



CONSTRUCTION



IRRIGATION



ROADWORKS




### Market Leading LED Solutions

- Surface Mount Device (SMD) LED with Micro-Lens
- Smaller and more lightweight
- Energy-efficient LEDs, ideal for power sensitive applications.
- Impact Protection Standard: IK10
- Ingress Protection Standard: IP69

### 4 x 250W

Average light intensity  
over 5000m<sup>2</sup> area

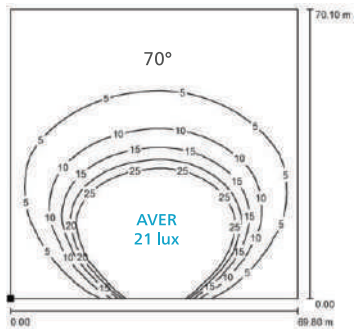

## Features

<b>LIGHT COVERAGE</b> 5.000 m <sup>2</sup> (AVERAGE 20 LUXES)	<b>LIFE SPAN</b> 50.000 Hrs LED
<b>IP PROTECTION</b> Heavy duty lights with IP69 protection	<b>COLOR RENDERING INDEX</b> > 85 OUT OF 100
<b>EASY SERVICABILITY</b>	<b>EASY ACCESS</b> TO ALL COMPONENTS
<b>FUEL CONSUMPTION</b> 0.8 L/H	<b>SERVICE INTERVAL (HRS)</b> 250
<b>IMPACT PROTECTION</b> IK 10 GRADE	<b>UP TO 40% LESS FUEL AND CO<sub>2</sub> EMISSIONS</b>