



Atlas Copco



HiLighting the future

The HiLight range of light towers

HiLight V5+ 2 cylinder

Spread brighter light

The new HiLight V5+ with 2 cylinder engine and new design LED lamps increases stability and robustness for use in harsher and more rugged environment.

We have really put our innovation stamp on LED technology. The lenses in our LED light towers have a very special optic designed for construction, mining and other application. This innovative, fully directional, LED lens design means we maximize the light coverage and reduce "lighting waste". At Atlas Copco we have a strong commitment with the innovation and the environment, and therefore we have developed new technologies that provide bright and efficient light with 40% lesser emissions, lowest fuel consumption and even low noise level.

Digital controller for operations

- Front: IP51 and rear: IP20
- Operating temperature: 20°C to 70°C



New innovative LED lamps so we can light up the way

- Compact and lighter LED setup increases light tower stability and robustness
- Modular COB type LED floodlights with unique directional optics
- New generation floodlight that increases expected lifetime by 40% (Approx lifetime: 50000 hours)
- IP67 rating for LED lights for better protection
- High CRI score = close to natural light effect

FUEL
CONSUMPTION

0.8 l/h



SERVICE
INTERVAL (HRS)

500



LIFE SPAN

50.000

Hrs



LIGHT
COVERAGE

5.000 m²

AVG. 20 LUXES

ADDITIONAL
FEATURES

HardHat®



IP PROTECTION

Heavy duty
lights with
IP 67 protection



COLOR RENDERING
INDEX

> 85
OUT OF 100



UP TO

40% LESS

FULE AND CO₂ EMISSIONS



LOW
SERVICE
COST



EASY
SERVICEABILITY
AND ACCESS



HIGH
EFFICIENCY



TRANSPORT
EFFICIENCY
16 ut



13m Truck




Engine: Kohler/ Lombardini

- Two cylinder
- Water cooled
- Rated speed: 1500 rpm



New

Even light distribution

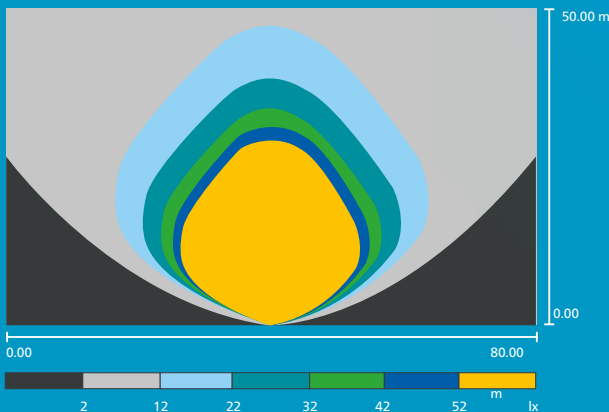

HiLight V5+

Making sites brighter and safer

The HiLight V5+ are the light towers that construction sites, outdoor events and industries around the world have been asking for. These light towers offer the ultimate in fuel economy and reliability.

The HiLight V5+ include a HardHat® canopy as standard, which ensures maximum protection of internal parts. This range of light towers is perfect for multiple drop applications and providing users a robust and easy-to-transport set of lighting options that match any site requirements. The extended safety features also guarantee the protection during transportation.



FUEL CONSUMPTION

 **0.9** l/h

**SERVICE
INTERVAL (HRS)**
250 

LIFE SPAN
30,000 Hrs 

QUIET OPERATION
75 dB(A) 
as per CPCB II

**LIGHT
COVERAGE**
5.000 m²
AVG. 20 LUXES 

**ADDITIONAL
FEATURES**
HardHat® 

**COLOR RENDERING
INDEX**
> 85 
OUT OF 100


IP PROTECTION
Heavy duty
lights with
IP 67 protection 

**LOW
SERVICE
COST** 

EASY 
**SERVICEABILITY
AND ACCESS**

HIGH 
EFFICIENCY

1 light tower... 7 components... 21 optional combinations...

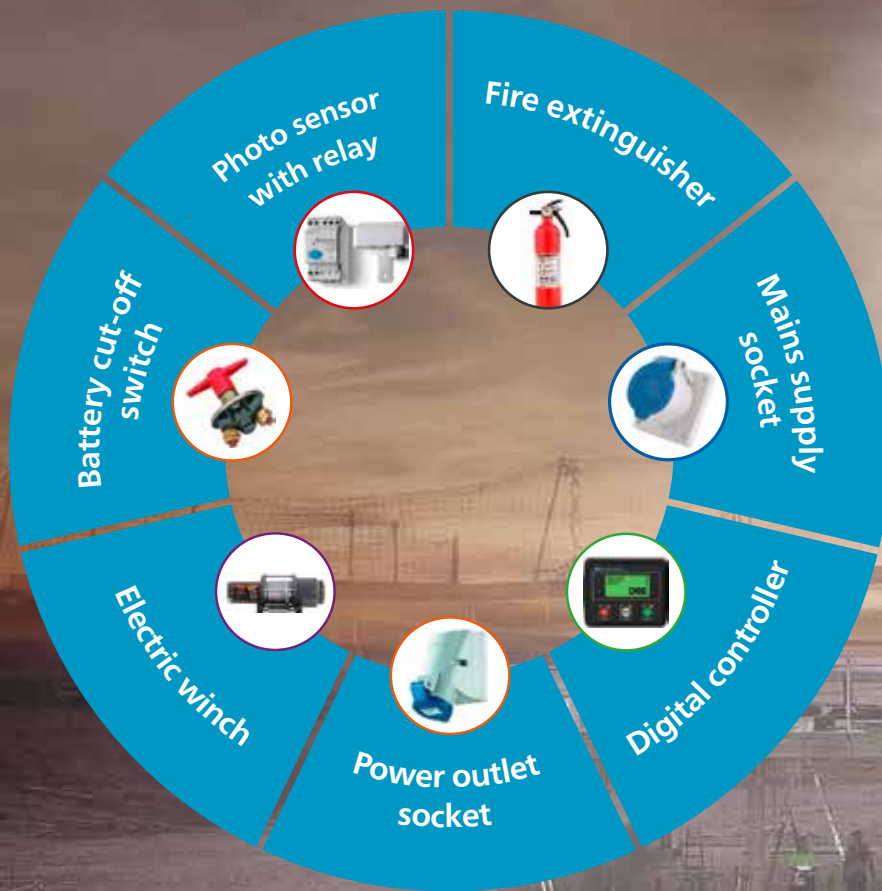


Choose the one that best fits your needs


	Segments	Energy Efficiency	Running hours	Area coverage	Easy movement	Lamps durability	Service interval	Transport efficiency
HiLight V5+ 2 cyl	 MINING & QUARRY  CONSTRUCTION	●	○	●	●	●	●	○
HiLight V5+	 CONSTRUCTION  QUARRY  EVENTS	●	○	●	●	●	●	○

● Best choice ○ Suitable


Additional standard features



Integrated lifting point



Forklift slots

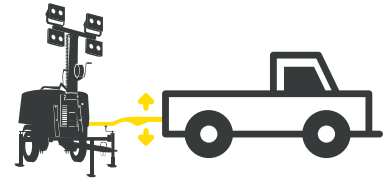

Straight / Foldable / Adjustable tow bar

What's unique about our LED technology?



- LED HiLight tower lamps have an aluminum casting which provides heavy duty protection, even during transportation.
- The LED lamps have a high CRI (Color Rendering Index) score (> 85 out of 100).
- The specially designed directional optics of the LED HiLight range offer incredible light distribution.
- Our LED HiLight towers achieve up to 5000 m² of light coverage with an average level of 20 luxes.
- LED lamps have a life expectancy of more than 50.000 hours.
- Our LED technology enables us to set the industry benchmark when it comes to fuel efficiency.

HiLight LED savings per year (per unit, compared to a metal halide light tower)



(*) Savings will vary depending on comparison models.

		HiLight V5+	HiLight V5+2 cylinder
Light coverage m ²		5000 (average 20 luxes)	
Lamps		LED	
Mast		Vertical manual	
Extra features		HardHat® canopy	
Performance data			
Rated frequency	Hz	50	
Rated voltage	VAC	230	
Rated power (PRP)	kW	5	
Operating temperature (min/max)	°C	-15 / >50	
Sound power level (LwA)	dB(A)	86	-
Sound pressure level (LpA) at 7m	dB(A)	<70 at 1 mtr	-
Engine			
Model		Kohler / Lombardini	Kohler / Lombardini
Speed	rpm	3000	1500
Rated net output (PRP)	kW	6.7	5.1
Coolant		Air Cooled	Water Cooled
Number of cylinders		1	2
Alternator			
Model		Sincro	Meccalte
Rated output	kVA	5	
Insulation / Enclosure protection	class/IP	H / 21	
Energy Consumption			
Fuel tank capacity	l	80	76
Autonomy	h	88	95
Power output			
Auxiliary power	kW	10 AMPS only if Lamps are OFF	
Lights			
Floodlights		LED	
Wattage	W	4 x 350	
Mast			
Type		Manual vertical, 5 section	
Rotation	degrees	355	
Maximum height	m	7,5	
Maximum speed wind	km/h	80	
Enclosure and trailer			
Enclosure		Gull-wing HardHat® doors	
Dimensions and weight			
Dimensions in transport Fix Towbar(L x W x H)	m	1.9 X 1.1 X 2.5	
Weight (Dry / WET)	kg	664 / 764	



HiLight V5+



HiLight V5+ 2 cylinder

Product Portfolio

Air Compressors

Ready To Go

- 160-412 cfm
- 7-8.5 bar



Versatility

- 450-650 cfm
- 7-14 bar



Productivity Partner

- 1000-1350 cfm
- 19-35 bar



Diesel and electric options available.

Light Towers

LED



Metal Halide



Electric



Generators

Portable Mobile Industrial



Dewatering Pumps

Diesel Driven Canopy



Electric Submersible



Diesel Driven Open Frame



Diesel and electric options available.

Handheld Tools

Pneumatic tools

- Breakers (2.5 – 40 kg)
- Rockdrills (5 – 25 kg)
- Underground Rockdrills
- Additional Air Tools



Hydraulic tools

- Breakers (11 – 40 kg)
- Additional Hydraulic Tools
- Powerpacks



Petrol engine driven tools

- Breakers & Tampers (25 kg)
- Rockdrills (23 Kg)



Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.

Contact:

S Kumar: +91 99406 86506, s.kumar@atlascopco.com
Prakash Khobragade: +91 93314 11141, prakash.khobragade@atlascopco.com

Atlas Copco

Atlas Copco India Ltd.

Reach us: cr.india@atlascopco.com

Toll free number: 1800 120 110030

atlascopco.com/en-in